

**Type No. 1N63A****T-01-07****GOLD BONDED GERMANIUM DIODE**

6 Lake Street  
PO Box 1436  
Lawrence, MA 01841  
Telephone (617) 681-0392  
TeleFax (617) 681-9135  
Telex 928377

**FEATURES**

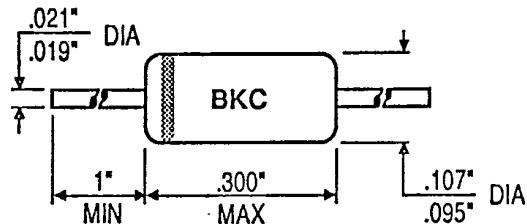
- Low forward voltage drop—low power consumption**
- Thirty years of proven reliability—one million hours mean time between failures (MTBF)**
- Very low noise level**
- Metallurgically bonded**

**ABSOLUTE MAXIMUM RATINGS** (at 25 °C, unless otherwise specified)

<b>Peak Inverse Voltage</b>	100 Volts
<b>Peak Forward Current</b>	500 mA
<b>Operating Temperature Range</b>	- 65 °C to 85 °C
<b>Average Power Dissipation</b>	80 mW

**ELECTRICAL CHARACTERISTICS**

	Symbol	Conditions	Min	Max	Unit	T °C
<b>Peak Inverse Voltage</b>	PIV	1 mA	100		V	25 °C
<b>Reverse Current</b>	Ir	50 V		50	µA	25 °C
<b>Forward Voltage</b>	Vf	4 mA		1	V	25 °C

**MECHANICAL**

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.